

NOTES:

1. \varnothing REPRESENTS A CRITICAL DIMENSION.
2. PUSHOUT FORCE TO BE: 2 lb. (32oz) MIN.
3. ORIENTATION OF PART IN T&R MAY VARY DEPENDING ON POCKET.
4. MAX CUT FLASH .030 ON TAIL AND POST.

TABLE 1			
LEAD STYLE	"B"	TERMINAL	"C"
-01	.230 [5.84]	T-1S6-08-X-2	.180 [4.57]
-02	.320 [8.13]	T-1S6-15-X-2	.190 [4.83]
-03	.420 [10.67]	T-1S6-09-X-2	.190 [4.83]
-04	.120 [3.05]	T-1S6-07-X-2	.190 [4.83]

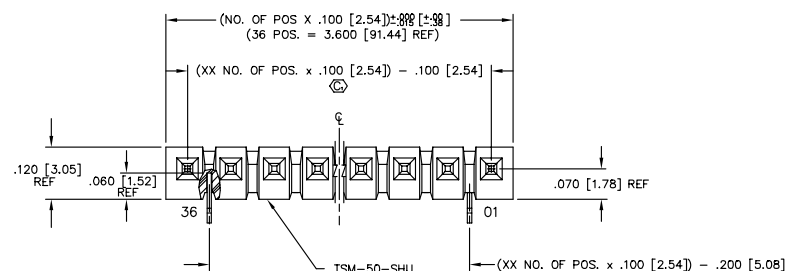


FIG. 1
-LC: LOCKING CLIP OPTION
CLIPS N/A WITH -A OPTION.

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONSIDERED TO BE PROPRIETARY TO
SANTEC. IT IS NOT TO BE REPRODUCED
OR TRANSMITTED IN ANY FORM OR BY
ANY MEANS, ELECTRONIC OR MECHANICAL,
INCLUDING PHOTOCOPYING, RECORDING,
OR BY ANY INFORMATION STORAGE AND
RETRIEVAL SYSTEM, WITHOUT THE
WRITTEN CONSENT OF SANTEC INC.

DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE NOTED	TOLERANCES ARE:	ANGLES	TITLE:	DWG NO:
ONE PLACE DECIMALS ± .1 [3]	THREE PLACE DECIMALS ± .005 [.13]			± 2°	TERMINAL STRIP SINGLE SURFACE MOUNT	TSM-1XX-XX-XXX-SH-XX-XXX-XX
TWO PLACE DECIMALS ± .01 [.25]	FOUR PLACE DECIMALS ± .0020 [.051]					SHEET 1 OF 2

TSM-1XX-XX-XXX-SH-XX-XXX-XX

No OF POSITIONS
-02 THRU -36

LEAD STYLE
SEE TABLE 1

PLATING SPEC.

- T: TIN
- S: SELECTIVE
- G: GOLD
- L: SELECTIVE
- F: FLASH SELECTIVE
- H: HEAVY GOLD
- P: GOLD FLASHED PALLADIUM NICKEL
- TL: TIN/LEAD (-01 LEAD STYLE ONLY)
- STL: SELECTIVE TIN/LEAD (-01 LEAD STYLE ONLY)
- TM: MATTE TIN
- SM: HEAVY SELECTIVE GOLD, MATTE TIN TAIL
- LM: LIGHT SELECTIVE GOLD, MATTE TIN TAIL
- FM: FLASH SELECTIVE GOLD, MATTE TIN TAIL

ROW SPECIFICATION
-SH: SINGLE HORIZONTAL

OPTION #3

- P: PICK & PLACE PAD (SEE FIG. 3)
USE PPP-08 (-03 THRU -36 POSITION
OR 02 & 03 POSITION WITH -TR ONLY)
- TR: TAPE & REEL (-02 THRU -30 POSITION)
(LEADS MAY NOT BE VISIBLE FOR CUSTOMER
VISUAL INSPECTION ON SMALLER POSITION
PARTS WHEN USED WITH -P OPTION.)
- K: POLYIMIDE FILM (SEE FIG. 6, SHT. 2)
(-04 THRU -36 POSITION)
(-02 & -03 POSITIONS WITH -TR ONLY)

OPTION #2

- XXX: POLARIZED POSITION
SPECIFY OMITTED PIN


OPTION #1

- LC: LOCKING CLIP (SEE FIG. 1)
USE LC-09-TM (-03 THRU -36 POS USE 2 PER STRIP)
(-02 POS USE 1 PER STRIP)
(USE TSM-50-SHU)
- A: ALIGNMENT PIN
(USE TSM-XX-SH-A BODY FOR MOLDED -A PINS, POS -02,
SEE FIG 2, SHEET 2)
(USE TSM-50-SHU-XX BODY FOR MOLDED -A PINS, POS -03
THRU -50, SEE FIG 2, SHEET 2)
(USE TSM-50-SHU BODY FOR STAKED -A PINS, POS -04
THRU -50, SEE FIG 4, SHEET 2)
LEAVE BLANK FOR NO HOLD
DOWN OPTION (USE TSM-50-SHU SEE FIG. 1,
CAN BE CUT TO POSITION) N/A ON STYLE -03

DIFFERENT AS SHOWN. OTHERWISE SAME AS FIG. 1.

TABLE 3

POS.	"E"
ODD	.150 [3.81]
EVEN	.100 [2.54]

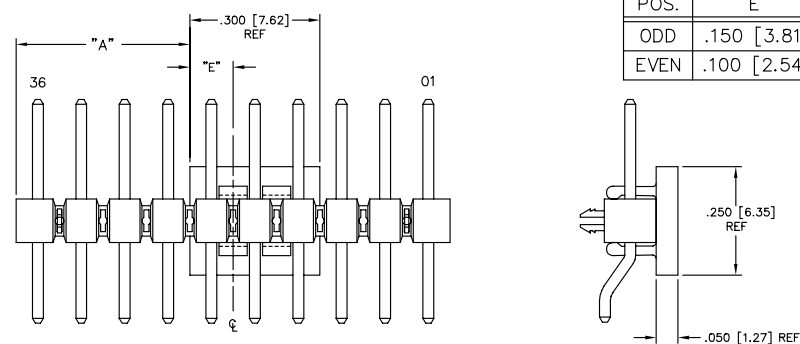

$$\text{FOR ODD: "A"} = \frac{(\text{NO. OF POS} \times .100 [2.54]) - .300 [7.62]}{2}$$

$$\text{FOR EVEN: "A"} = \left[\frac{(\text{NO. OF POS} \times .100 [2.54]) - .300 [7.62]}{2} \right] + .050 [1.27]$$

FIG. 3
-P: PICK & PLACE PAD
USE PACKAGING TUBE PT-1-24-07-29
PLACE PPP-08 ON \varnothing AS SHOWN

MATERIAL:
BODIES:
LIQUID CRYSTAL POLYMER
COLOR: BLACK
TERMINALS:
PHOSPHOR BRONZE

santec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-0733 P.O. BOX 1147
CODE 55322

MADE BY:
REIDINGER 7-19-91

EXSPROD\ASSEMBLY\100
TSMASHM
SHEET 1 OF 2