

2100 SERIES PIN HEADER 2.54x2.54mm STRAIGHT TYPE

MATERIAL:

HOUSING : SEE ORDER INFORMATION (UL94V-0)

HOUSING COLOR : SEE TABLE

TERMINAL : COPPER ALLOY

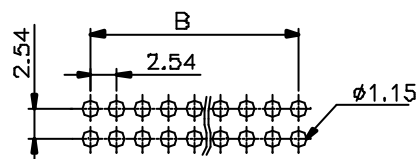
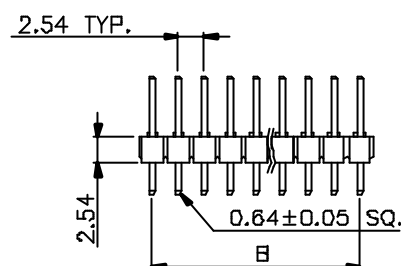
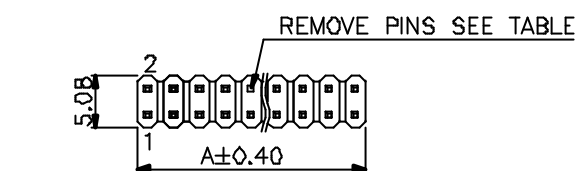
TERMINAL PLATING : Au OVER 50u"min.

Ni UNDER PLATED OVERALL.(SEE TABLE)



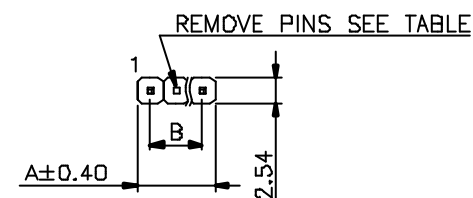
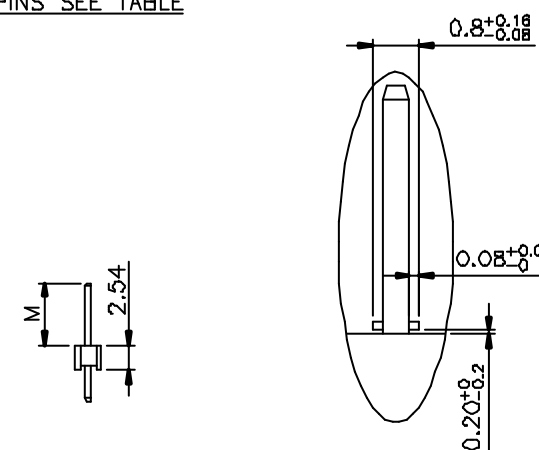
ORDER INFORMATION
G2100C888-*** *

SEE TABLE

HOUSING MATERIAL :

"T":THERMOPLASTIC (HIGHEST DEFORMATION
TEMP. IS 250°C/5SEC)"H":HIGH THERMOPLASTIC (HIGHEST
DEFORMATION TEMP. IS 270°C/5SEC)RECOMMENDED P.C.BOARD
HOLE LAYOUT
DUAL ROWS

NOTE : P.C.B LAYOUT TOLERANCE: ±0.05mm

RECOMMENDED P.C.BOARD
HOLE LAYOUT
SINGLE ROWSDETAIL A
(S=4:1)GENERAL
TOLERANCE
±0.25mm
GENERAL ANGLE
TOLERANCE
±3°

WISON TECHNOLOGIES CO., LTD

DRAWN BY Any(WSC)

CHECKED BY JIMMY

APPROVED BY JERRY

SORTING NO. WSC

PART NO.:
G2100C888-****

DRAWING NO. G2100C888-****

DRAWING SIZE A4

UNIT mm

PAGE 1 OF 5



REFERENCE

[ARTICLE:044033 V4]

| DASH# | NUMBER OF POSITIONS | A DIMENSION | B DIMENSION | M DIMENSION | P DIMENSION | PINS REMOVED | PLATED | HOUSING COLOR |
|-------|---------------------|-------------|-------------|-------------|-------------|-----------------------------------|--------|---------------|
| 001 | 1*3 | 7.62 | 5.08 | 6.00 | 2.54 | NONE | 1u"Au | BLACK |
| 002 | 1*3 | 7.62 | 5.08 | 6.00 | 2.54 | 2 | 1u"Au | BLACK |
| 003 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 10 | 1u"Au | BLACK |
| 004 | 2*9 | 22.86 | 20.32 | 6.00 | 2.54 | 1 , 5 | 1u"Au | BLACK |
| 005 | 2*8 | 20.32 | 17.78 | 6.00 | 2.54 | 7 | 1u"Au | BLACK |
| 006 | 2*8 | 20.32 | 17.78 | 6.00 | 2.54 | 4 , 7 | 1u"Au | BLACK |
| 007 | 2*9 | 22.86 | 20.32 | 6.00 | 2.54 | 14 | 1u"Au | BLACK |
| 008 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 6 | 1u"Au | BLACK |
| 009 | 2*8 | 20.32 | 17.78 | 6.00 | 2.54 | 14 | 1u"Au | BLACK |
| 010 | 2*7 | 17.78 | 15.24 | 6.00 | 2.54 | 6 | 1u"Au | BLACK |
| 011 | 2*13 | 33.02 | 30.48 | 6.00 | 2.54 | 1 | 1u"Au | BLACK |
| 012 | 2*13 | 33.02 | 30.48 | 6.00 | 2.54 | 20 | 1u"Au | BLACK |
| 013 | 2*13 | 33.02 | 30.48 | 6.00 | 2.54 | 23 | 1u"Au | BLACK |
| 014 | 2*7 | 17.78 | 15.24 | 6.00 | 2.54 | 6,7,10 | 1u"Au | BLACK |
| 015 | 2*13 | 33.02 | 30.48 | 6.00 | 2.54 | 1,24 | 1u"Au | BLACK |
| 016 | 2*17 | 43.18 | 40.64 | 6.00 | 2.54 | 5 | 1u"Au | BLACK |
| 017 | 2*20 | 50.8 | 48.26 | 6.00 | 2.54 | 20 | 1u"Au | BLACK |
| 018 | 2*13 | 33.02 | 30.48 | 6.00 | 2.54 | 25 | 1u"Au | BLACK |
| 019 | 2*4 | 10.16 | 7.62 | 6.00 | 2.54 | 1 | 1u"Au | BLACK |
| 020 | 2*4 | 10.16 | 7.62 | 6.00 | 2.54 | 5 | 1u"Au | BLACK |
| 021 | 2*7 | 17.78 | 15.24 | 6.00 | 2.54 | 3 | 1u"Au | BLACK |
| 022 | 2*7 | 17.78 | 15.24 | 6.00 | 2.54 | 2 | 1u"Au | BLACK |
| 023 | 2*8 | 20.32 | 17.78 | 6.00 | 2.54 | 16 | 1u"Au | BLACK |
| 024 | 2*8 | 20.32 | 17.78 | 6.00 | 2.54 | 13 | 1u"Au | BLACK |
| 025 | 2*10 | 25.4 | 22.86 | 6.00 | 2.54 | 4,14,19 | 1u"Au | BLACK |
| 026 | 2*3 | 7.62 | 5.08 | 6.00 | 2.54 | 3 | 1u"Au | BLACK |
| 027 | 2*20 | 50.8 | 48.26 | 6.00 | 2.54 | 25,27,28 | 1u"Au | BLACK |
| 028 | 2*26 | 66.04 | 63.5 | 6.00 | 2.54 | 7 | 1u"Au | BLACK |
| 029 | 2*13 | 33.02 | 30.48 | 6.00 | 2.54 | 26 | 1u"Au | BLACK |
| 030 | 2*27 | 68.58 | 66.04 | 6.00 | 2.54 | 7,8,15,16,23,24,31,32,39,40,47,48 | 1u"Au | BLACK |
| 031 | 2*17 | 43.18 | 40.64 | 6.00 | 2.54 | 16,17,18,24 | 1u"Au | BLACK |
| 032 | 2*3 | 7.62 | 5.08 | 6.00 | 2.54 | 1 | 1u"Au | BLACK |
| 033 | 2*8 | 20.32 | 17.78 | 6.00 | 2.54 | 2,11,12,16 | 1u"Au | BLACK |
| 034 | 2*10 | 25.4 | 22.86 | 6.00 | 2.54 | 4 | 1u"Au | BLACK |
| 035 | 2*2 | 5.08 | 2.54 | 6.00 | 2.54 | 4 | 1u"Au | BLACK |

| REV | DATE | DESCRIPTION | ECN NO. | NAME |
|-----|----------|-------------|--------------|---------|
| A | 05.03.07 | NEW RELEASE | | Anly |
| B | 05.10.31 | ADD OPTION | TECR05001450 | WZJUN |
| B1 | 05.11.09 | ADD OPTION | | Anly |
| B2 | 06.03.09 | ADD OPTION | | Anly |
| B3 | 06.04.08 | ADD OPTION | | Kisskys |
| B4 | 06.06.05 | ADD OPTION | | LCJ |

| DASH# | NUMBER OF POSITIONS | A DIMENSION | B DIMENSION | M DIMENSION | P DIMENSION | PINS REMOVED | PLATED | HOUSING COLOR |
|-------|---------------------|-------------|-------------|-------------|-------------|-----------------|--------|---------------|
| 036 | 2*13 | 33.02 | 30.48 | 6.00 | 2.54 | 2,5,8,10 | 1u"Au | BLACK |
| 037 | 2*17 | 43.18 | 40.64 | 6.00 | 2.54 | 9,10 | 1u"Au | BLACK |
| 038 | 2*17 | 43.18 | 40.64 | 6.00 | 2.54 | 17,24 | 1u"Au | BLACK |
| 039 | 2*17 | 43.18 | 40.64 | 6.00 | 2.54 | 17,30 | 1u"Au | BLACK |
| 040 | 2*17 | 43.18 | 40.64 | 6.00 | 2.54 | 25,27,28 | 1u"Au | BLACK |
| 041 | 2*17 | 43.18 | 40.64 | 6.00 | 2.54 | 27,28 | 1u"Au | BLACK |
| 042 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 8 | 1u"Au | BLACK |
| 043 | 2*8 | 20.32 | 17.78 | 6.00 | 2.54 | 2 | 1u"Au | BLACK |
| 044 | 2*17 | 43.18 | 40.64 | 6.00 | 2.54 | 17 | 1u"Au | BLACK |
| 045 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 2 | 1u"Au | BLACK |
| 046 | 2*31 | 78.74 | 76.2 | 6.00 | 2.54 | NONE | 1u"Au | BLACK |
| 047 | 2*15 | 38.1 | 35.56 | 6.00 | 2.54 | 7,8,15,16,23,24 | 1u"Au | BLACK |
| 048 | 2*7 | 17.78 | 15.24 | 6.00 | 2.54 | 14 | 1u"Au | BLACK |
| 049 | 2*3 | 7.62 | 5.08 | 6.00 | 2.54 | NONE | 1u"Au | BLACK |
| 050 | 1*4 | 10.16 | 7.62 | 6.00 | 2.54 | NONE | 1u"Au | BLACK |
| 051 | 1*2 | 5.08 | 2.54 | 6.00 | 2.54 | NONE | 1u"Au | BLACK |
| 052 | 2*8 | 20.32 | 17.78 | 6.00 | 2.54 | 10,14 | 1u"Au | BLACK |
| 053 | 1*8 | 20.32 | 17.78 | 6.00 | 2.54 | 4 | 1u"Au | BLACK |
| 054 | 2*4 | 10.16 | 7.62 | 6.00 | 2.54 | NONE | 1u"Au | BLACK |
| 055 | 2*2 | 5.08 | 2.54 | 6.00 | 2.54 | NONE | 1u"Au | BLACK |

| | | | | |
|---|---|-----------|-----------------------------|----------------|
| GENERAL TOLERANCE ±0.25mm GENERAL ANGLE TOLERANCE ±3°  |  WIESON TECHNOLOGIES CO., LTD | | PART NO.: G2100C888—**** | |
| | DRAWN BY | Anly(WSC) | DRAWING NO. | G2100C888—**** |
| | CHECKED BY | JIMMY | DRAWING SIZE | A4 |
| | APPROVED BY | JERRY | UNIT | mm |
| | SORTING NO. | WSC | PAGE | 2 OF 5 |

REFERENCE

[ARTICLE:044033 V4]

A

B

C

D

E

1

2

3


4

Customer Drawing

| DASH# | NUMBER OF POSITIONS | A DIMENSION | B DIMENSION | M DIMENSION | P DIMENSION | PINS REMOVED | PLATED | HOUSING COLOR |
|-------|-------------------------|-------------|-------------|-------------|-------------|--------------|--------|---------------|
| 056 | 2*10 | 25.4 | 22.86 | 6.00 | 2.54 | 10 | 1u"Au | BLACK |
| 057 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | NONE | 1u"Au | BLACK |
| 058 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 4,7 | 1u"Au | BLACK |
| 059 | 1*5 | 12.7 | 10.16 | 6.00 | 2.54 | 2 | 1u"Au | BLACK |
| 060 | 2*7 | 17.78 | 15.24 | 6.00 | 2.54 | 13 | 1u"Au | BLACK |
| 061 | 2*8 | 20.32 | 17.78 | 6.00 | 2.54 | 4 | 1u"Au | BLACK |
| 062 | 2*3 | 7.62 | 5.08 | 6.00 | 2.54 | 2 | 1u"Au | BLACK |
| 063 | particular spec(SMT) | | | | | | | |
| 064 | particular spec(ANCHOR) | | | | | | | |
| 065 | 2*8 | 20.32 | 17.78 | 6.00 | 2.54 | 8,16 | 1u"Au | BLACK |
| 066 | 2*9 | 22.86 | 20.32 | 6.00 | 2.54 | 13 | 1u"Au | BLACK |
| 067 | 2*5 | 12.7 | 10.16 | 6.00 | 3.0 | 10 | 1u"Au | BLACK |
| 068 | 2*17 | 43.18 | 40.64 | 6.00 | 2.54 | 3,25,26 | 1u"Au | BLACK |
| 069 | particular spec(SMT) | | | | | | | |
| 070 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 2 | 1u"Au | WHITE |
| 071 | particular spec(SMT) | | | | | | | |
| 072 | particular spec(SMT) | | | | | | | |
| 073 | particular spec(STAPLE) | | | | | | | |
| 074 | 1*3 | 7.62 | 5.08 | 6.00 | 3.0 | NONE | 1u"Au | BLACK |
| 075 | 1*3 | 7.62 | 5.08 | 6.00 | 3.0 | 2 | 1u"Au | BLACK |
| 076 | 2*5 | 12.7 | 10.16 | 6.00 | 3.0 | 10 | 1u"Au | BLACK |
| 077 | 2*5 | 12.7 | 10.16 | 6.00 | 3.0 | 8 | 1u"Au | BLACK |
| 078 | 2*5 | 12.7 | 10.16 | 6.00 | 3.0 | 2 | 1u"Au | BLACK |
| 079 | 1*2 | 5.08 | 2.54 | 6.00 | 3.0 | NONE | 1u"Au | BLACK |
| 080 | 2*8 | 20.32 | 17.78 | 6.00 | 3.0 | 10,14 | 1u"Au | BLACK |
| 081 | 1*8 | 20.32 | 17.78 | 6.00 | 3.0 | 4 | 1u"Au | BLACK |
| 082 | 2*10 | 25.4 | 22.86 | 6.00 | 3.0 | 10 | 1u"Au | BLACK |
| 083 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 2 | 1u"Au | BLUE(301C) |
| 084 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 10 | 1u"Au | WHITE |
| 085 | 2*12 | 30.48 | 27.94 | 6.00 | 2.54 | 3 | 1u"Au | BLACK |

| REV | DATE | DESCRIPTION | ECN NO. | NAME |
|-----|----------|--------------|--------------|---------|
| A | 05.03.07 | NEW RELEASE | | Anly |
| B | 05.10.31 | △ ADD OPTION | TECR05001450 | WZJUN |
| B1 | 05.11.09 | △ ADD OPTION | | Anly |
| B2 | 06.03.09 | △ ADD OPTION | | Anly |
| B3 | 06.04.08 | △ ADD OPTION | | Kisskys |
| B4 | 06.06.05 | △ ADD OPTION | | LCJ |

| DASH# | NUMBER OF POSITIONS | A DIMENSION | B DIMENSION | M DIMENSION | P DIMENSION | PINS REMOVED | PLATED | HOUSING COLOR |
|-------|-------------------------|-------------|-------------|-------------|-------------|--------------|--------|---------------|
| 086 | 2*7 | 17.78 | 15.24 | 6.00 | 2.54 | 8 | 1u"Au | BLACK |
| 087 | particular spec(ANCHOR) | | | | | | | |
| 088 | particular spec(SMT) | | | | | | | |
| 089 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 3,9 | 1u"Au | BLACK |
| 090 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 7,9 | 1u"Au | BLACK |
| 091 | 2*17 | 43.18 | 40.64 | 6.00 | 2.54 | 3,25,26 | 15u"Au | BLACK |
| 092 | 1*3 | 7.62 | 5.08 | 6.00 | 3.0 | 2 | 1u"Au | BLACK |
| 093 | particular spec(SMT) | | | | | | | |
| 094 | particular spec(SMT) | | | | | | | |
| 095 | 1*3 | 7.62 | 5.08 | 6.00 | 3.00 | NONE | 1u"Au | BLACK |
| 096 | 1*3 | 7.62 | 5.08 | 6.00 | 3.00 | 2 | 1u"Au | BLACK |
| 097 | 2*5 | 12.7 | 10.16 | 6.00 | 3.00 | 10 | 1u"Au | BLACK |
| 098 | 2*8 | 20.32 | 17.78 | 6.00 | 3.00 | 14 | 1u"Au | BLACK |
| 099 | 2*3 | 7.62 | 5.08 | 6.00 | 3.00 | 3 | 1u"Au | BLACK |
| 100 | 2*10 | 25.4 | 22.86 | 6.00 | 3.00 | 4 | 1u"Au | BLACK |
| 101 | 2*5 | 12.7 | 10.16 | 6.00 | 3.00 | 8 | 1u"Au | BLACK |
| 102 | 2*5 | 12.7 | 10.16 | 6.00 | 3.00 | 2 | 1u"Au | BLACK |
| 103 | 2*3 | 7.62 | 5.08 | 6.00 | 3.00 | NONE | 1u"Au | BLACK |

| | | | | |
|--|--|-------------|-----------------------------|----------------|
| GENERAL TOLERANCE ±0.25mm GENERAL ANGLE TOLERANCE ±3° |  WIESON TECHNOLOGIES CO., LTD | | PART NO.: G2100C888—**** | |
| | DRAWN BY | Anly(WSC) | DRAWING NO. | G2100C888—**** |
| | CHECKED BY | JIMMY | DRAWING SIZE | A4 |
| | APPROVED BY | JERRY | UNIT | mm |
| | | SORTING NO. | WSC | PAGE |

REFERENCE

[ARTICLE:044033 V4]






1

2

3



4

Customer Drawing

| REV | DATE | DESCRIPTION | ECN NO. | NAME |
|-----|----------|--|--------------|---------|
| A | 05.03.07 | NEW RELEASE | | Anly |
| B | 05.10.31 |  ADD OPTION | TECR05001450 | WZJUN |
| B1 | 05.11.09 |  ADD OPTION | | Anly |
| B2 | 06.03.09 |  ADD OPTION | | Anly |
| B3 | 06.04.08 |  ADD OPTION | | Kisskys |
| B4 | 06.06.05 |  ADD OPTION | | LCJ |






| DASH# | NUMBER OF POSITIONS | A DIMENSION | B DIMENSION | M DIMENSION | P DIMENSION | PINS REMOVED | PLATED | HOUSING COLOR |
|-------|--|-------------|-------------|-------------|-------------|--------------|--------|---------------|
| 104 | 1*4 | 10.16 | 7.62 | 6.00 | 3.00 | NONE | 1u"Au | BLACK |
| 105 | 1*2 | 5.08 | 2.54 | 6.00 | 3.00 | NONE | 1u"Au | BLACK |
| 106 | 2*8 | 20.32 | 17.78 | 6.00 | 3.00 | 10,14 | 1u"Au | BLACK |
| 107 | 2*10 | 25.4 | 22.86 | 6.00 | 3.00 | 10 | 1u"Au | BLACK |
| 108 | 2*5 | 12.7 | 10.16 | 6.00 | 3.00 | 4,7 | 1u"Au | BLACK |
| 109 | 1*5 | 12.7 | 10.16 | 6.00 | 3.00 | 2 | 1u"Au | BLACK |
| 110 | 2*7 | 17.78 | 15.24 | 6.00 | 3.00 | 13 | 1u"Au | BLACK |
| 111 | 2*3 | 7.62 | 5.08 | 6.00 | 3.00 | 2 | 1u"Au | BLACK |
| 112 | 2*8 | 20.32 | 17.78 | 6.00 | 3.00 | 8,16 | 1u"Au | BLACK |
| 113 | 2*5 | 12.7 | 10.16 | 6.00 | 3.00 | 2 | 1u"Au | WHITE |
| 114 | 2*5 | 12.7 | 10.16 | 6.00 | 3.00 | 2 | 1u"Au | BLUE(301C) |
| 115 | 2*5 | 12.7 | 10.16 | 6.00 | 3.00 | 10 | 1u"Au | WHITE |
| 116 | 2*7 | 17.78 | 15.24 | 8.08 | 3.00 | NONE | 15u"Au | BLACK |
| 117 | PARTICULAR SPEC | | | | | | | |
| 118 | 2*3 | 7.62 | 5.08 | 6.00 | 3.00 | 1 | 1u"Au | BLACK |
| 119 | 2*8 | 20.32 | 17.78 | 6.00 | 3.00 | 12 | 1u"Au | BLACK |
| 120 | 2*12 | 30.48 | 27.94 | 6.00 | 2.54 | NONE | 15u"Au | BLACK |
| 121 | PARTICULAR SPEC(G2100C888-003* WITH COLOR LABEL) | | | | | | | |
| 122 | 2*12 | 30.48 | 27.94 | 6.00 | 3.00 | NONE | 15u"Au | BLACK |
| 123 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 8 | 1u"Au | YELLOW |
| 124 | 1*6 | 15.24 | 12.7 | 6.00 | 2.54 | 3 | 1u"Au | BLACK |
| 125 | 1*2 | 5.08 | 2.54 | 6.00 | 3.00 | NONE | 15u"Au | BLACK |
| 126 | 1*6 | 15.24 | 12.7 | 6.00 | 3.00 | NONE | 15u"Au | BLACK |
| 127 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 2 | 1u"Au | YELLOW |
| 128 | 1*3 | 7.62 | 5.08 | 6.00 | 2.54 | 3 | 1u"Au | BLACK |
| 129 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 9 , 10 | 1u"Au | BLACK |
| 130 | 2*7 | 17.78 | 15.24 | 6.00 | 2.54 | 10 | 1u"Au | BLACK |
| 131 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 7 , 8 | 1u"Au | BLACK |
| 132 | 2*6 | 15.24 | 12.7 | 6.00 | 2.54 | 11 | 1u"Au | BLACK |
| 133 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 10 | 1u"Au | YELLOW |
| 134 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 2 | 1u"Au | GREEN(355C) |
| 135 | 1*5 | 12.7 | 10.16 | 6.00 | 2.54 | 2 | 1u"Au | YELLOW |
| 136 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 8 | 1u"Au | GREEN(355C) |









| DASH# | NUMBER OF POSITIONS | A DIMENSION | B DIMENSION | M DIMENSION | P DIMENSION | PINS REMOVED | PLATED | HOUSING COLOR |
|-------|---|-------------|-------------|-------------|-------------|--------------|--------|---------------|
| 137 | 2*7 | 17.78 | 15.24 | 6.00 | 2.54 | 9,13 | 1u"Au | BLACK |
| 138 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 9,10 | 1u"Au | BLUE(301C) |
| 139 | PARTICULAR SPEC (G2100C888-139* WITH COLOR LABEL) | | | | | | | |
| 140 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 5 | 1u"Au | BLACK |
| 141 | 2*8 | 20.32 | 17.78 | 6.00 | 2.54 | 12 | 1u"Au | BLACK |
| 142 | PARTICULAR SPEC | | | | | | | |
| 143 | PARTICULAR SPEC | | | | | | | |
| 144 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 2 | 1u"Au | RED(186U) |
| 145 | PARTICULAR SPEC | | | | | | | |
| 146 | 2*6 | 15.24 | 12.7 | 6.00 | 2.54 | 8 | 1u"Au | BLACK |
| 147 | 2*6 | 15.24 | 12.7 | 6.00 | 2.54 | 8 | 1u"Au | YELLOW |
| 148 | PARTICULAR SPEC | | | | | | | |
| 149 | PARTICULAR SPEC | | | | | | | |
| 150 | PARTICULAR SPEC | | | | | | | |
| 151 | PARTICULAR SPEC | | | | | | | |
| 152 | PARTICULAR SPEC | | | | | | | |
| 153 | PARTICULAR SPEC | | | | | | | |
| 154 | PARTICULAR SPEC | | | | | | | |
| 155 | PARTICULAR SPEC | | | | | | | |
| 156 | PARTICULAR SPEC | | | | | | | |
| 157 | PARTICULAR SPEC | | | | | | | |



| | | | | | |
|---|---|-----------|--------------|----------------|----------------|
| GENERAL TOLERANCE ±0.25mm GENERAL ANGLE TOLERANCE ±3°  |  WIESON TECHNOLOGIES CO., LTD | | PART NO.: | | G2100C888—**** |
| | | | | | |
| | | | | | |
| | | | | | |
| | DRAWN BY | Anly(WSC) | DRAWING NO. | G2100C888—**** | |
| | CHECKED BY | JIMMY | DRAWING SIZE | | A4 |
| | APPROVED BY | JERRY | UNIT | mm | |
| | SORTING NO. | WSC | PAGE | 4 OF 5 | |

REFERENCE

[ARTICLE:044033 V4]

| REV | DATE | DESCRIPTION | ECN NO. | NAME |
|-----|----------|--|--------------|---------|
| A | 05.03.07 | NEW RELEASE | | Anly |
| B | 05.10.31 |  ADD OPTION | TECR05001450 | WZJUN |
| B1 | 05.11.09 |  ADD OPTION | | Anly |
| B2 | 06.03.09 |  ADD OPTION | | Anly |
| B3 | 06.04.08 |  ADD OPTION | | Kisskys |
| B4 | 06.06.05 |  ADD OPTION | | LCJ |

| | DASH# | NUMBER OF POSITIONS | A DIMENSION | B DIMENSION | M DIMENSION | P DIMENSION | PINS REMOVED | PLATED | HOUSING COLOR |
|---|-------|---------------------|-------------|-------------|-------------|-------------|--------------|--------|---------------|
|  | 158 | 2*5 | 12.7 | 10.16 | 6.00 | 2.54 | 10 | 1u"Au | GREEN (355c) |
|  | 159 | 2*7 | 17.78 | 15.24 | 6.00 | 2.54 | NONE | 15u"Au | BLACK |
|  | 160 | PARTICULAR SPEC | | | | | | | |
|  | 161 | PARTICULAR SPEC | | | | | | | |
|  | 162 | 2*14 | 35.56 | 33.02 | 6.00 | 2.54 | NONE | 1u"Au | GREEN (355c) |
|  | 163 | 2*5 | 12.7 | 10.16 | 6.00 | 3.00 | 5 | 1u"Au | BLACK |
|  | 164 | 1*10 | 25.4 | 22.86 | 6.00 | 2.54 | 9 | 1u"Au | BLACK |
|  | 165 | 2*5 | 12.7 | 10.16 | 6.00 | 3.00 | NONE | 1u"Au | BLACK |

| | | | | |
|---|--|-----------------------------|--------------|----------------|
| GENERAL TOLERANCE ±0.25mm GENERAL ANGLE TOLERANCE ±3°  |  WIESON TECHNOLOGIES CO., LTD | PART NO.: G2100C888—**** | | |
| | DRAWN BY | Anly(WSC) | DRAWING NO. | G2100C888—**** |
| | CHECKED BY | JIMMY | DRAWING SIZE | A4 |
| | APPROVED BY | JERRY | UNIT | mm |
| | SORTING NO. | WSC | PAGE | 5 OF 5 |