
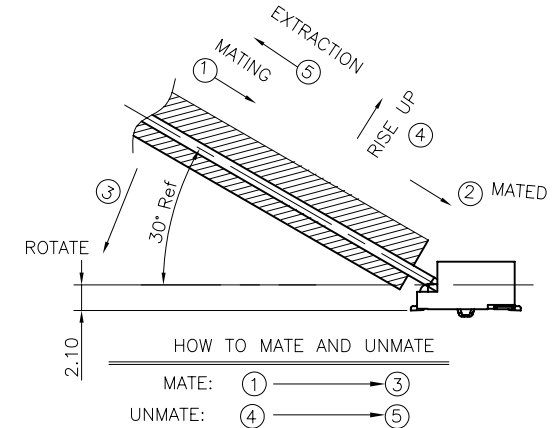



REV.	ECR/N NO./DESCRIPTION	DATE	DRAWN	CHECKED	APPROVE
A	SN11***	07/15'11	XU	Vito	Barney

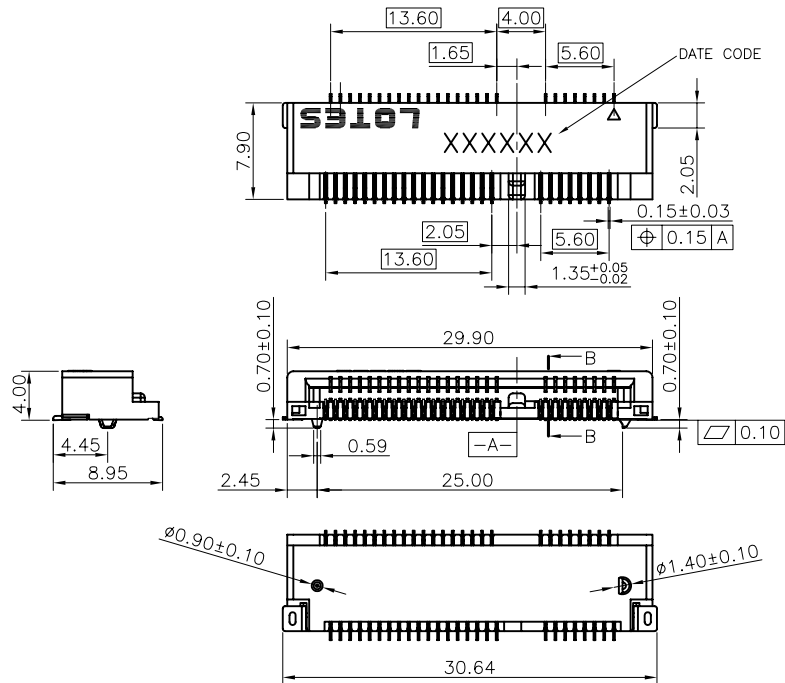

XXXXXX  
 Date  
 Week  
 Year  
 DATE CODE

TABLE

NOTES:

1.MATERIAL:

CONTACT:BRASS,50u"Min.NICKEL UNDERPLATING.  
 GOLD PLATING ON CONTACT AREA AND ON SOLDER AREA.(DETAIL SEE TABLE)

PEG:BRASS,50u"Min.NICKEL UNDERPLATING,  
 MATTE-Tin 100u"Min OVER NICKEL.

HOUSING:LCP,UL-94V0

2.ROHS,HF COMPLIANT.

3.ELECTRICAL PERFORMANCE

CONTACT RESISTANCE:55mΩ MAX.PER CONTACT

INSULATION RESISTANCE:500MΩ MIN


4.MECHANICAL PERFORMANCE


DURABILITY:50 CYCLES



MATING AND UNMATING FORCE:2.3Kgf MAX

5.IR REFLOW TEMPERATURE:250°C±10°C FOR 10 SECONDS MAX.




6.PRODUCT NUMBER NOTE:AAA-PCI-\*\*\*-\*\*\*-\*

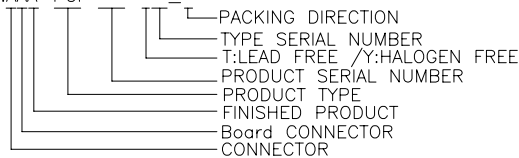

2		AAA-PCI-049-Y06		BLACK,Au 10u"			
1		AAA-PCI-049-T01		BLACK,GOLD FLASH1u" MIN			
NO.		PART NO.		DESCRIPTION			
GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.  SEE TABLE		<b>LOTES</b>			
.X ± 0.35	X.° ± 3°						
.XX ± 0.25	.X.° ± 2°						
.XXX ± 0.15	.XX° ± 1°						
		APPROVED BY  Barney		TITLE  MINI PCIEXPRESS 4.0H 0.8PITCH 52P			
CUSTOMER DRAWING		CHECKED BY  Vito		DWG NO.  AP-AAA-PCI-049-T			
SIZE	UNITS	DRAWN BY  XU			SHEET	SCALE	REV
A4	MM[INCH]				1 / 4	5 : 3	A

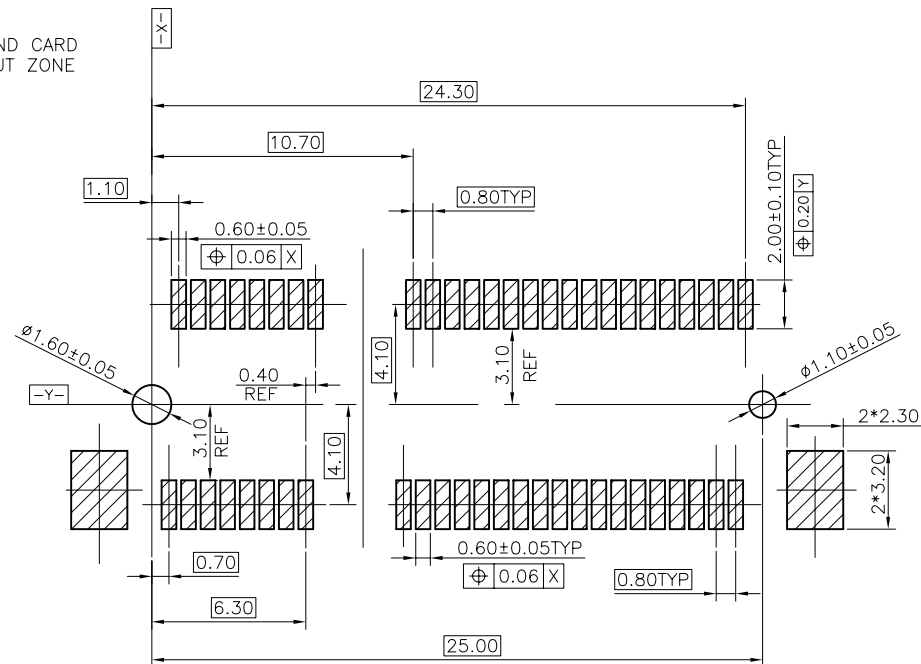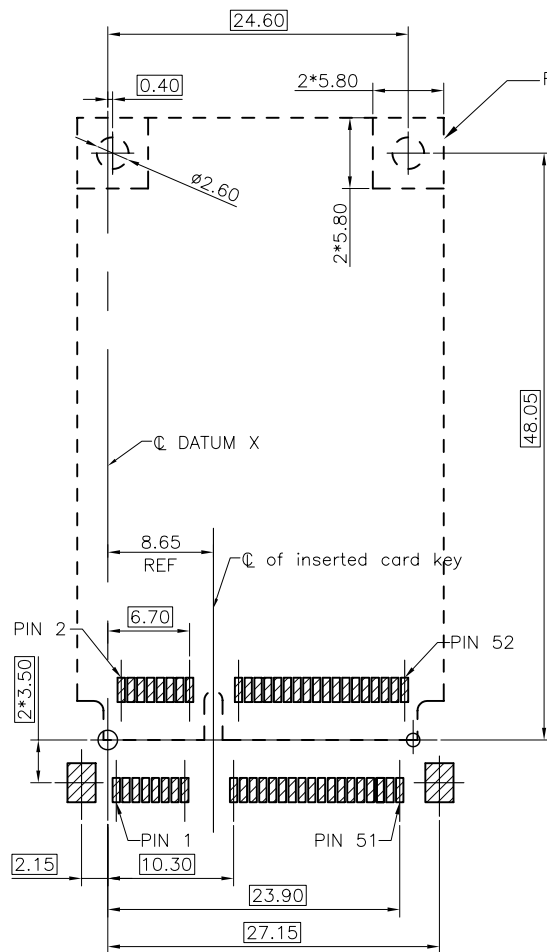




GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.	<b>LOTES</b>			
		SEE TABLE				
.X $\pm 0.35$	.X° $\pm 3^\circ$	APPROVED BY	TITLE <b>MINI PCI EXPRESS</b> 4.0H 0.8PITCH 52P			
.XX $\pm 0.25$	.X° $\pm 2^\circ$	Barney				
.XXX $\pm 0.15$	.XX° $\pm 1^\circ$	CHECKED BY	DWG NO. AP-AAA-PCI-049-T			
CUSTOMER DRAWING		Vito				
SIZE	UNITS	DRAWN BY	XU	SHEET	SCALE	REV
A4	MM[INCH]					

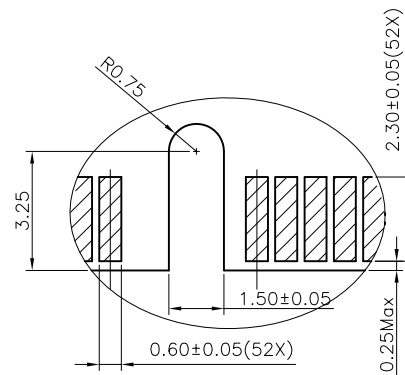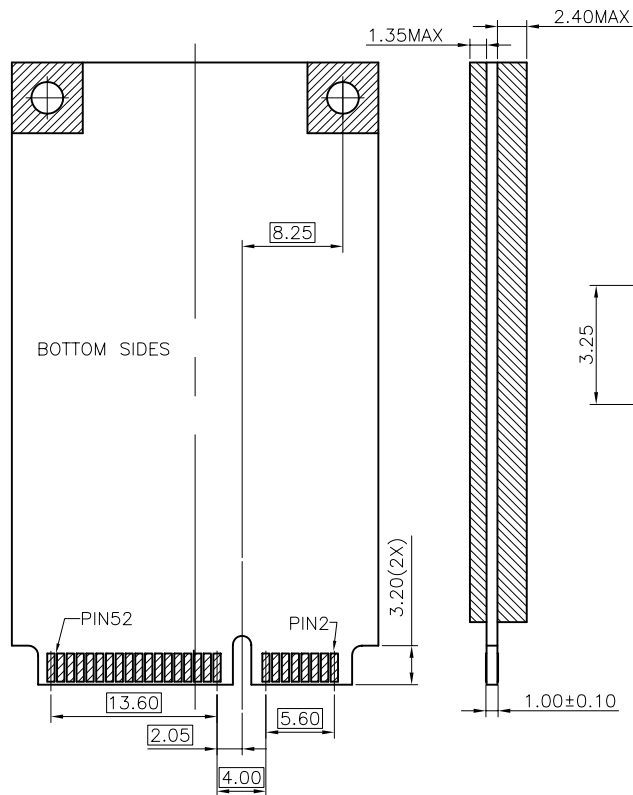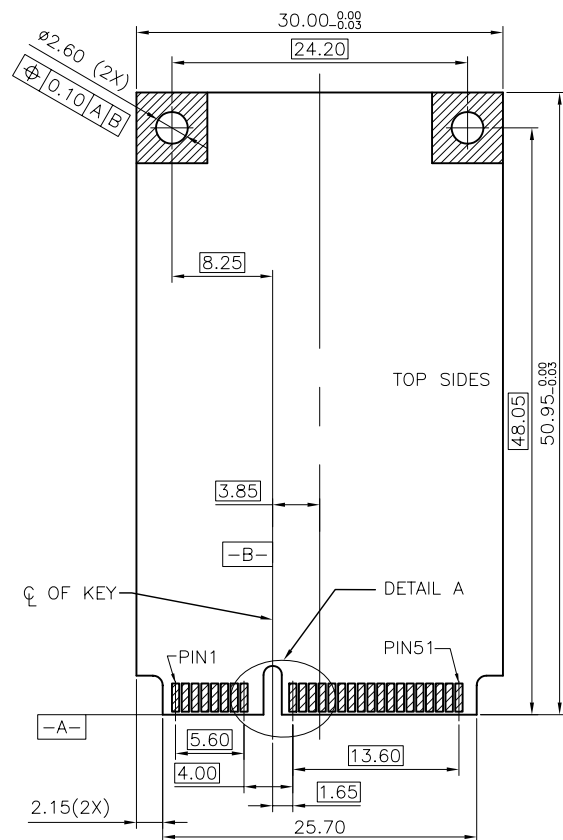

DETAIL A  
SCALE 12:1

MINI PCI EXPRESS MODULE BOARD LAYOUT  
GENERAL TOLERANCE  $\pm 0.05\text{mm}$

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. SEE TABLE	<b>LOTES</b>			
<del>X ± 0.35</del>	<del>X° ± 3°</del>					
<del>.XX ± 0.25</del>	<del>.X° ± 2°</del>	APPROVED BY Barney	TITLE MINI PCIEXPRESS 4.0H 0.8PITCH 52P			
<del>.XXX ± 0.15</del>	<del>.XX° ± 1°</del>	CHECKED BY Vito	DWG NO. AP-AAA-PCI-049-T			
CUSTOMER DRAWING		DRAWN BY XU		SHEET	SCALE	REV
SIZE A4	UNITS MM[INCH]			3 / 4	5 : 3	A

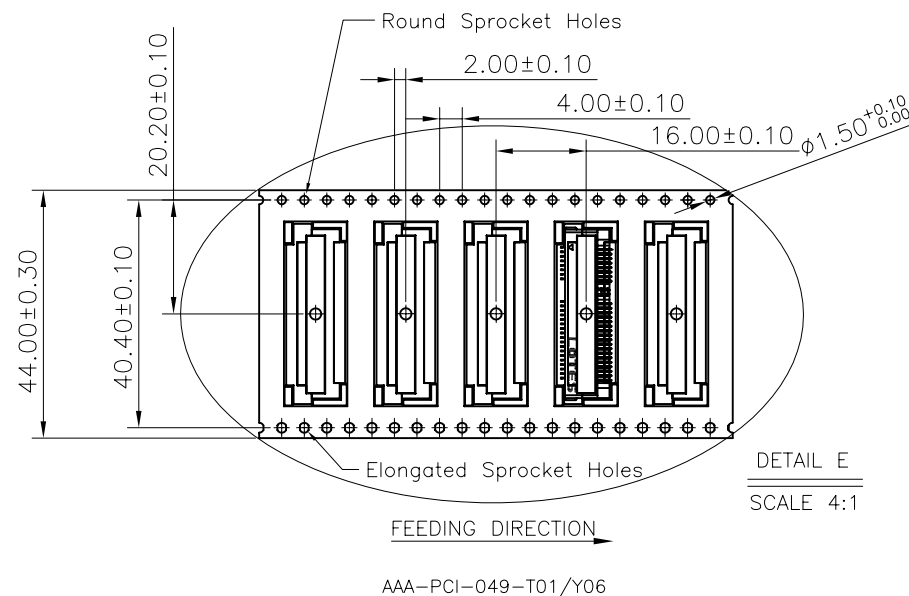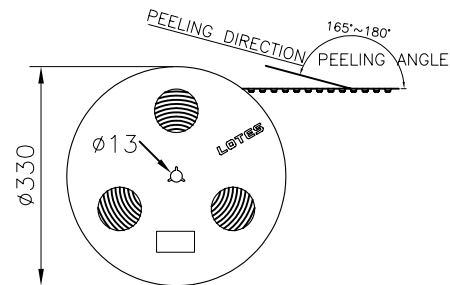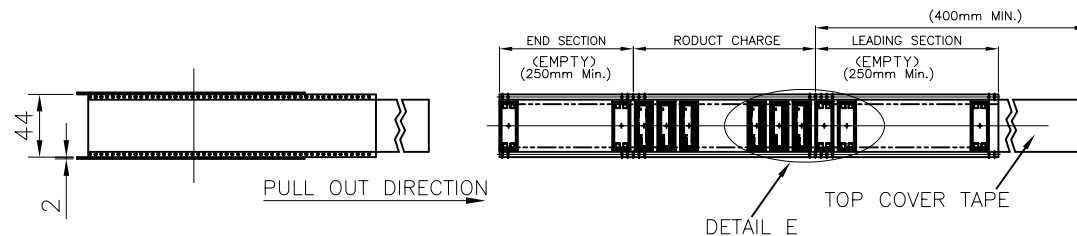

#### NOTES:

##### 1. MATERIAL :

- 1.1 CARRY TAPE: PS
- 1.2 COVER TAPE: PET
- 1.3 SHIPPING CARTON: CORRUGATED FIBER

##### 2. DIMENSION :

- 2.1 REEL: W=44.5,  $\phi A=330$
- 2.2 SHIPPING CARTON: L=335, W=335, H=300 (INNER)

##### 3. QUANTITY :


- 3.1 PRIMARY PACKING: 700 PCS/REEL
- 3.2 SECONDARY PACKING: 6 REELS/CARTON(4200PCS)

##### 4. WEIGHT :

- 4.1 NET WEIGHT: 4.956Kg/CARTON.
- 4.2 GROSS WEIGHT: 8.892Kg/CARTON.

##### 5. PEELING RESISTANCE: 20gf~120gf.

##### 6. PEELING SPEED: 300mm/minutes.

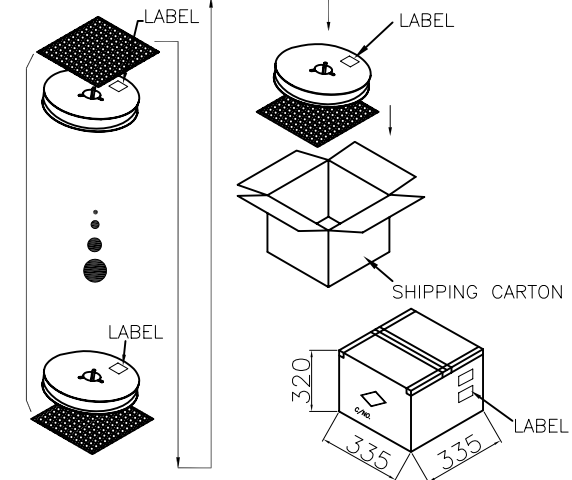

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. SEE TABLE	<b>LOTES</b>			
.X ± 0.35	X° ± 3°					
.XX ± 0.25	X° ± 2°	APPROVED BY Barney	TITLE MINI PCIEXPRESS 4.0H 0.8PITCH 52P			
.XXX ± 0.15	.XX° ± 1°	CHECKED BY Vito	DWG NO. AP-AAA-PCI-049-T			
CUSTOMER DRAWING		DRAWN BY XU		SHEET 4 / 4	SCALE N/A	REV A
SIZE A4	UNITS MM[INCH]					