


Tantalum Capacitor, 220 uF, 20% Tol, 6.3V@85C, D Case, Molded,  
 Standard Profile, Ultra Low ESR

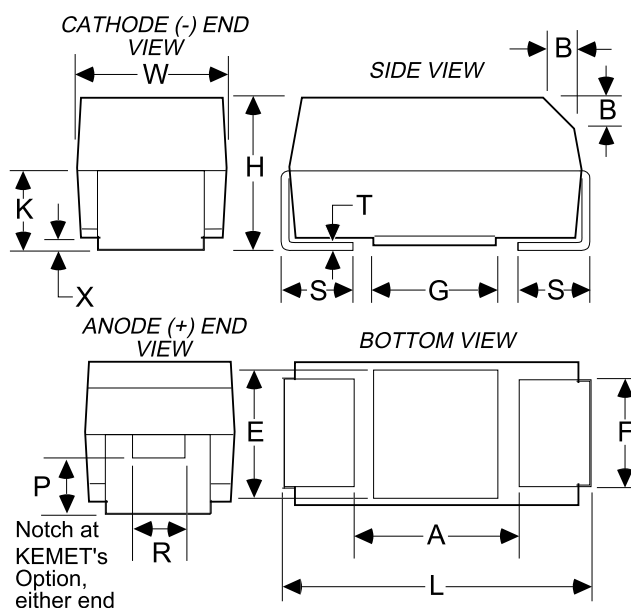

### Dimensions (mm)

### Specifications

ID	Dimension	Tolerance	Application:	Low ESR
L	7.30	+/-0.30	Capacitance:	220 uF
W	4.30	+/-0.30	Tolerance:	20%
H	2.80	+/-0.30	Voltage DC @ 85C:	6.3V
K	1.50	+/-0.20	Voltage DC @ 105C:	6.3V
F	2.40	+/-0.10	Temperature Range:	-55/+105C
S	1.30	+/-0.30	Size Code:	D
B	0.50	+/-0.15	Footprint:	7343
X	0.10	ref	Body Type:	Molded Chip
P	0.90	ref	Packaging:	T&R
R	1.00	ref	Package Quantity:	500
T	0.13	ref	Termination Type:	Tin (Pb free)
A	3.80	ref	Leakage Current:	139 uA
G	3.50	ref	Dissipation Factor:	10%
E	3.50	ref	ESR:	15 mOhm
			Ripple @ 25C:	3.9 A
			Ripple @ 85C:	3.9 A
			Ripple @ 105C:	3.9 A

