






PCB LAYOUT

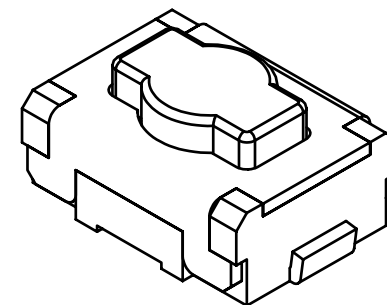

CIRCUIT: SPST

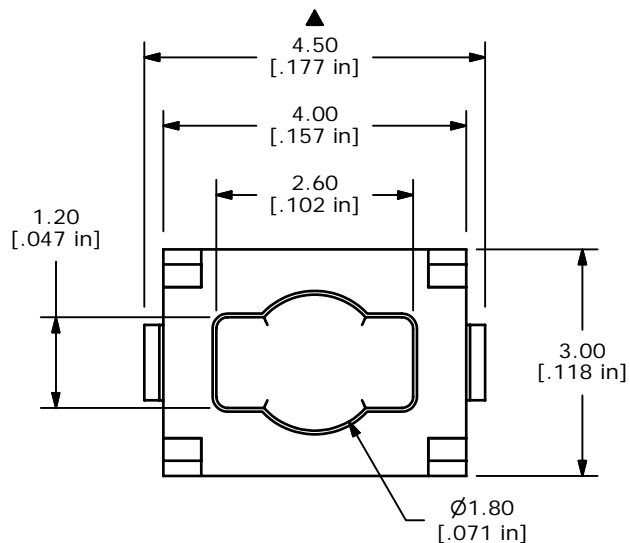


ISOMETRIC

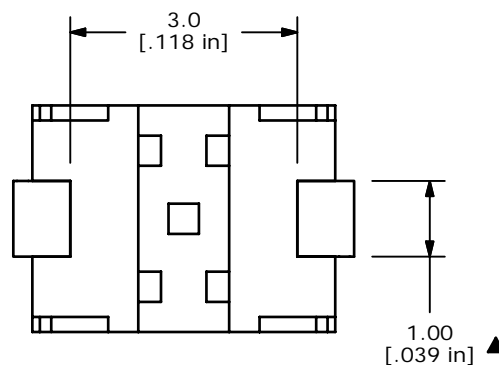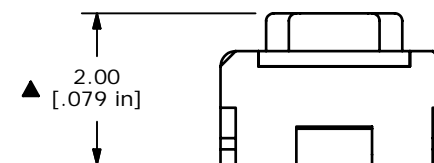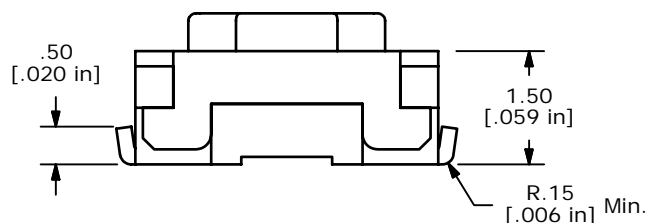

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲5. OPERATING FORCE: 160 ± 50 gms
6. TRAVEL: 0.2mm ±0.1
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 50,000 CYCLES MIN.
9. PACKAGE: TAPE AND REEL - 2500 PIECES PER REEL
10. ▲ DENOTES CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT

C	17031	ADDED DIM. AND NOTES	2/23/07	TN					
B	16076	REMOVE TOLERANCES FROM DIMENSIONS	6/1/2006	CT					
A	14788	RELEASED FOR PRODUCTION	3/24/05	AR	TITLE TL1015AF160QG				
REV	PCR NO	DESCRIPTION	DATE	BY	SCALE 14:1	DATE 2/23/2007	DR TN	DWG D400101	REV C
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									