


Land Rover High Capacity Pick-Up





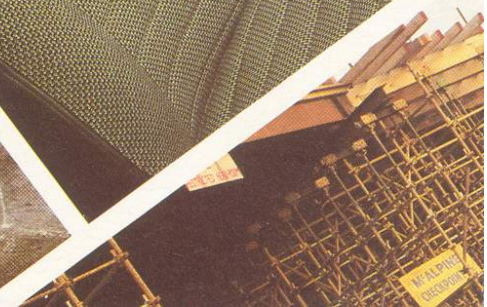

A pick-up for all your applications with a pay load of up to 1.3 tonnes. This vehicle is the latest long wheelbase model to be added to the comprehensive range of Land Rovers. It is available with two different suspension packages which are optional depending upon your requirements and the type of use for which the vehicle is intended.

- 3020 kg GVW – This is the high load specification which offers a large payload of 1.3 tonnes and substantial load area capabilities.
- 2710 kg GVW – The suspension on this derivative is for the Land Rover owner wanting increased load area and giving a **1 tonne payload**.
- The high Capacity Pick-Up has a full width tailgate and localised wheelarches which minimise intrusion into the payload area.
- It is available with the 2¼ litre petrol or diesel engine or the 3½ litre petrol engine.
- The High Capacity Pick-Up has specific competitive advantages such as :-

PRODUCT FEATURES

- Standard 2710 Kg GVW and optional High-Load 3020 Kg GVW.
- Large 'Single-Plane' load area.
- All aluminium rust-proof body.
- Wide, full width tailgate with single-hand operation release levers.
- Localised wheelarches.
- Low loading height.
- Wide cargo bed.
- Ladder rack/Pole carrier.
- Rear lamp protection bars.

- **Additional features on the High-Load 3020 Kg GVW.**
- Massive 1.3 tonne payload.
- Low ratio steering.
- Steering damper.
- High load suspension.

LAND - ROVER

Land Rover High Capacity Pick-Up

TYRES

The current range of approved tyres are available on the 2710kg GVW version. For the 3020kg GVW High-Load the standard tyre is the Avon Range Ranger MK2-6 ply.

Optional tyres available are:

- Michelin XS.
- Michelin XC4 8 ply radial.
- Michelin XCL.
- Dunlop RTM 8 ply (not V8).
- Avon Range Master Radial


OPTIONAL EQUIPMENT

A wide range of accessories are available to meet all your requirements.

Specific items are:

- $\frac{3}{4}$ length canvas hood.
- 7 pin trailer socket and plug.
- Mudflaps.
- Towing drop plate/jaw/hook/ball.
- County seats.
- County acoustic trim.
- Cubby box (only in certain markets).

See your local Dealer for a complete list of the options and accessories available.

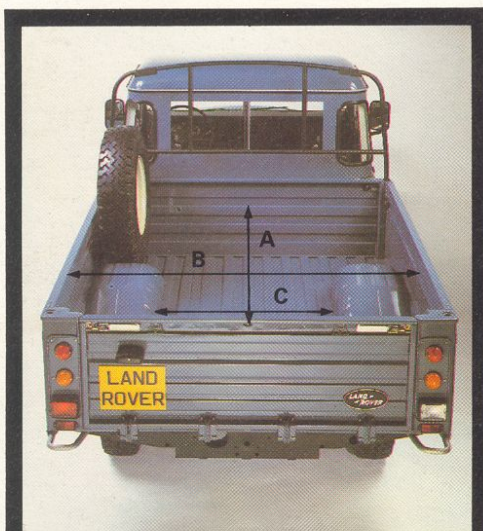

Bed length A = 2.01m (79")
Bed width B = 1.63m (64")
Bed width C = 0.92m (36")

ENGINE	BORE	STROKE	CAP- ACITY	MAX TORQUE	MAX POWER	TRANSMISSION
2½ litre Petrol	90.47 mm	88.9 mm	2286 cm ³	(117lb.ft.) at 2000 rpm	51.5kw/ 69bhp at 4000 rpm	Selectable 4 wheel drive
3½ litre Petrol	88.9 mm	71.1 mm	3528 cm ³	(166.5lb.ft.) at 2000 rpm	67.7kw/ 90.7bhp at 3500 rpm	Permanent four wheel drive through centre 3rd diff.
2½ litre Diesel	90.47 mm	88.9 mm	2286 cm ³	(103lb.ft.) at 1800 rpm	44.8kw/60bhp at 4000 rpm	Selectable 4 wheel drive



PAYLOAD DATA

Model	EEC Kerb Weight				EEC Payload				Non EEC Kerb Weight				Non EEC Payload			
	2710kg		3020kg		2710kg		3020kg		2710kg		3020kg		2710kg		3020kg	
	kgs	lbs	kgs	lbs	kgs	lbs	kgs	lbs	kgs	lbs	kgs	lbs	kgs	lbs	kgs	lbs
2½ Petrol	1627	3586	1686	3709	1083	2387	1334	2941	1503	3313	1562	3436	1207	2660	1458	3214
2½ Diesel	1676	3694	1719	3782	1034	2279	1301	2868	1544	3403	1587	3498	1166	2570	1433	3158
3½ Petrol	1674	3689	1717	3777	1036	2283	1303	2873	1550	3416	1593	3505	1160	2557	1427	3146

Note: EEC Kerb Weights—are the minimum vehicle specification + full tank and 75 kg driver.
Non-EEC Kerb Weights—are the minimum vehicle specification excluding driver and fuel.

TOWING WEIGHTS	P 4 cyl		D 4 cyl		P 8 cyl	
	On road	Off road	On road	Off road	On road	Off road
Trailer without brakes	500kg	500kg	500kg	500kg	500kg	500kg
Trailer with overrun brakes	2000kg 4410lb	1000kg 2205lb	2000kg 4410lb	1000kg 2205lb	2000kg 4410lb	1000kg 2205lb
4 wheel trailer with continuous or semi-continuous brakes, i.e. coupled brakes	4000kg 8820lb	1000kg 2205lb	3000kg 6615lb	1000kg 2205lb	4000kg 8820lb	1000kg 2205lb

Advised trailer nose weight limit 75kg.



Land Rover Ltd

Lode Lane, Solihull, West Midlands, England. Telephone: 021-743 4242 Telex: LanRovG338641 Cables Rover Solihull

PRINTED IN ENGLAND LR/199/2.82/70M(B)