

RoHS Compliant

## 2100 SERIES PIN HEADER 2.54x2.54mm STRAIGHT TYPE

### MATERIAL:

HOUSING: SEE ORDER INFORMATION (UL94V-0)

HOUSING COLOR: SEE TABLE




TERMINAL: COPPER ALLOY

TERMINAL PLATING: Au OVER 50u"min.  
Ni UNDER PLATED OVERALL.  
(SEE TABLE)




ORDER INFORMATION  
G2100C888-\*\*\* \*

SEE TABLE

HOUSING MATERIAL:  
" " : THERMOPLASTIC (HIGHEST DEFORMATION  
TEMP. IS 250°C/5SEC)  
"H": HIGH THERMOPLASTIC (HIGHEST  
DEFORMATION TEMP. IS 270°C/5SEC)

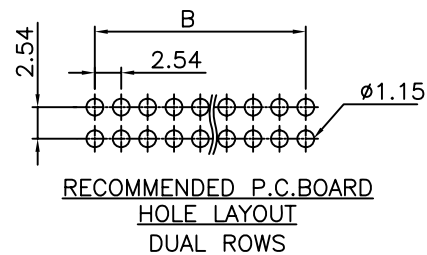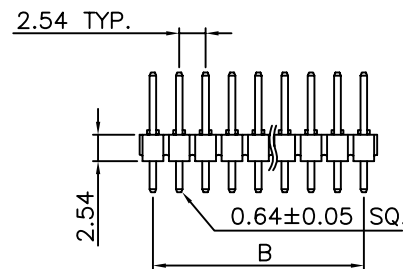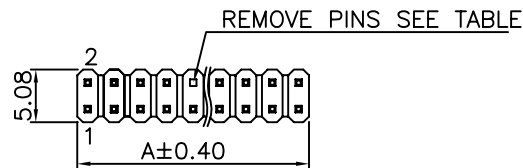


NOTE : P.C.B LAYOUT TOLERANCE: ±0.05mm

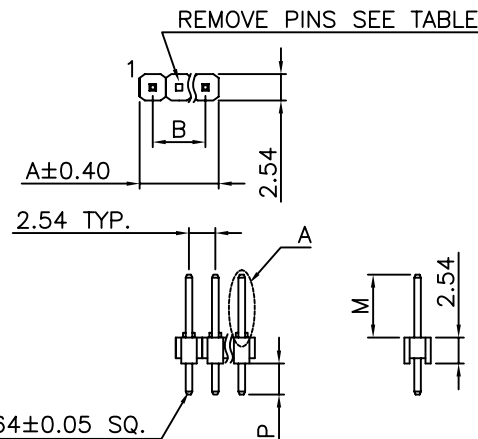

RECOMMENDED P.C. BOARD  
HOLE LAYOUT  
SINGLE ROWS

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	05.03.07	NEW RELEASE		Anly
B	05.10.31	ADD OPTION	TEC05001450	WZJUN
B15	08.05.07	ADD OPTION		Joanna
B16	08.10.14	ADD OPTION		LJ
B17	08.11.19	ADD OPTION		LJ
B18	08.12.08	ADD OPTION		LJ
B19	09.01.13	ADD OPTION		LJ
B20	09.01.20	ADD OPTION		violet
B21	09.01.22	ADD OPTION		violet
B22	09.02.11	CHANGE COLOR	CEC09003996	Wy
B23	09.02.17	CHANGE SPEC.		lj
B24	09.02.25	CHANGE SPEC.	CEC09004048	lj
B25	09.03.05	CHANGE SPEC.		Wy
B26	09.04.28	CHANGE SPEC.		LJ
B27	09.08.27	ADD OPTION		zx
B28	09.09.07	ADD OPTION		zx
B29	09.11.11	ADD OPTION		xzhen
B30	09.11.16	ADD OPTION		xzhen
B31	09.12.18	ADD OPTION		xzhen

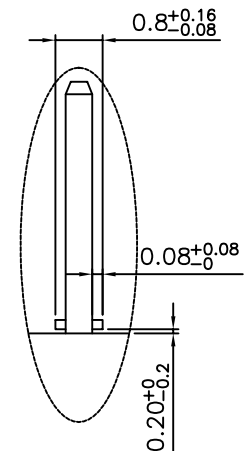

DETAIL A  
(S=4:1)

GENERAL TOLERANCE ±0.25mm GENERAL ANGLE TOLERANCE ±3° 	WIESON TECHNOLOGIES CO., LTD		PART NO.: G2100C888-****	
	DRAWN BY	Anly(WSC)	DRAWING NO.	G2100C888-****
	CHECKED BY	KEVIN	DRAWING SIZE	A4
	APPROVED BY	JERRY	UNIT	mm
	SORTING NO.	WSC	PAGE	1 OF 6

REFERENCE

[ARTICLE:044033 V4]


RoHS Compliant

DASH#	NUMBER OF POSITIONS	A DIMENSION	B DIMENSION	M DIMENSION	P DIMENSION	PINS REMOVED	PLATED	HOUSING COLOR
001	1*3	7.62	5.08	6.00	2.54	NONE	1u"Au	BLACK
002	1*3	7.62	5.08	6.00	2.54	2	1u"Au	BLACK
003	2*5	12.7	10.16	6.00	2.54	10	1u"Au	BLACK
004	2*9	22.86	20.32	6.00	2.54	1 , 5	1u"Au	BLACK
005	2*8	20.32	17.78	6.00	2.54	7	1u"Au	BLACK
006	2*8	20.32	17.78	6.00	2.54	4 , 7	1u"Au	BLACK
007	2*9	22.86	20.32	6.00	2.54	14	1u"Au	BLACK
008	2*5	12.7	10.16	6.00	2.54	6	1u"Au	BLACK
009	2*8	20.32	17.78	6.00	2.54	14	1u"Au	BLACK
010	2*7	17.78	15.24	6.00	2.54	6	1u"Au	BLACK
011	2*13	33.02	30.48	6.00	2.54	1	1u"Au	BLACK
012	2*13	33.02	30.48	6.00	2.54	20	1u"Au	BLACK
013	2*13	33.02	30.48	6.00	2.54	23	1u"Au	BLACK
014	2*7	17.78	15.24	6.00	2.54	6,7,10	1u"Au	BLACK
015	2*13	33.02	30.48	6.00	2.54	1,24	1u"Au	BLACK
016	2*17	43.18	40.64	6.00	2.54	5	1u"Au	BLACK
017	2*20	50.8	48.26	6.00	2.54	20	1u"Au	BLACK
018	2*13	33.02	30.48	6.00	2.54	25	1u"Au	BLACK
019	2*4	10.16	7.62	6.00	2.54	1	1u"Au	BLACK
020	2*4	10.16	7.62	6.00	2.54	5	1u"Au	BLACK
021	2*7	17.78	15.24	6.00	2.54	3	1u"Au	BLACK
022	2*7	17.78	15.24	6.00	2.54	2	1u"Au	BLACK
023	2*8	20.32	17.78	6.00	2.54	16	1u"Au	BLACK
024	2*8	20.32	17.78	6.00	2.54	13	1u"Au	BLACK
025	2*10	25.4	22.86	6.00	2.54	4,14,19	1u"Au	BLACK
026	2*3	7.62	5.08	6.00	2.54	3	1u"Au	BLACK
027	2*20	50.8	48.26	6.00	2.54	25,27,28	1u"Au	BLACK
028	2*26	66.04	63.5	6.00	2.54	7	1u"Au	BLACK
029	2*13	33.02	30.48	6.00	2.54	26	1u"Au	BLACK
030	2*27	68.58	66.04	6.00	2.54	7,8,15,16,23,24,31,32,39,40,47,48	1u"Au	BLACK
031	2*17	43.18	40.64	6.00	2.54	16,17,18,24	1u"Au	BLACK
032	2*3	7.62	5.08	6.00	2.54	1	1u"Au	BLACK
033	2*8	20.32	17.78	6.00	2.54	2,11,12,16	1u"Au	BLACK
034	2*10	25.4	22.86	6.00	2.54	4	1u"Au	BLACK
035	2*2	5.08	2.54	6.00	2.54	4	1u"Au	BLACK

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	05.03.07	NEW RELEASE		Anly
B	05.10.31	ADD OPTION	TECR05001450	WZJUN
B15	08.05.07	ADD OPTION		Joanna
B16	08.10.14	ADD OPTION		LJ
B17	08.11.19	ADD OPTION		LJ
B18	08.12.08	ADD OPTION		LJ
B19	09.01.13	ADD OPTION		LJ
B20	09.01.20	ADD OPTION		violet
B21	09.01.22	ADD OPTION		violet
B22	09.02.11	CHANGE COLOR	CECR09003996	Wy
B23	09.02.17	CHANGE SPEC.		Ij
B24	09.02.25	CHANGE SPEC.	CECR09004048	Ij
B25	09.03.05	CHANGE SPEC.		Wy
B26	09.04.28	CHANGE SPEC.		LJ
B27	09.08.27	ADD OPTION		zx
B28	09.09.07	ADD OPTION		zx
B29	09.11.11	ADD OPTION		xzhen
B30	09.11.16	ADD OPTION		xzhen
B31	09.12.18	ADD OPTION		xzhen

DASH#	NUMBER OF POSITIONS	A DIMENSION	B DIMENSION	M DIMENSION	P DIMENSION	PINS REMOVED	PLATED	HOUSING COLOR
036	2*13	33.02	30.48	6.00	2.54	2,5,8,10	1u"Au	BLACK
037	2*17	43.18	40.64	6.00	2.54	9,10	1u"Au	BLACK
038	2*17	43.18	40.64	6.00	2.54	17,24	1u"Au	BLACK
039	2*17	43.18	40.64	6.00	2.54	17,30	1u"Au	BLACK
040	2*17	43.18	40.64	6.00	2.54	25,27,28	1u"Au	BLACK
041	2*17	43.18	40.64	6.00	2.54	27,28	1u"Au	BLACK
042	2*5	12.7	10.16	6.00	2.54	8	1u"Au	BLACK
043	2*8	20.32	17.78	6.00	2.54	2	1u"Au	BLACK
044	2*17	43.18	40.64	6.00	2.54	17	1u"Au	BLACK
045	2*5	12.7	10.16	6.00	2.54	2	1u"Au	BLACK
046	2*31	78.74	76.2	6.00	2.54	NONE	1u"Au	BLACK
047	2*15	38.1	35.56	6.00	2.54	7,8,15,16,23,24	1u"Au	BLACK
048	2*7	17.78	15.24	6.00	2.54	14	1u"Au	BLACK
049	2*3	7.62	5.08	6.00	2.54	NONE	1u"Au	BLACK

GENERAL TOLERANCE  
±0.25mm  
GENERAL ANGLE TOLERANCE  
±3°



WIESON TECHNOLOGIES CO., LTD  
DRAWN BY  
CHECKED BY  
APPROVED BY  
SORTING NO.

PART NO.:  
G2100C888—\*\*\*\*  
DRAWING NO.  
DRAWING SIZE  
UNIT  
PAGE

A4



















mm

2 OF 6

REFERENCE



[ARTICLE:044033 V4]

RoHS Compliant

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	05.03.07	NEW RELEASE		Anly
B	05.10.31	 ADD OPTION	TECR05001450	WZJUN
B15	08.05.07	 ADD OPTION		
B16	08.10.14	 ADD OPTION		Jotadna
B17	08.11.19	 ADD OPTION		LJ
B18	08.12.08	 ADD OPTION		LJ
B19	09.01.13	 ADD OPTION		LJ
B20	09.01.20	 ADD OPTION		violet
B21	09.01.22	 ADD OPTION		violet
B22	09.02.11	 CHANGE COLOR	CECR09003996	Wy
B23	09.02.17	 CHANGE SPEC.		lj
B24	09.02.25	 CHANGE SPEC.	CECR09004048	lj
B25	09.03.05	 CHANGE SPEC.		Wy
B26	09.04.28	 CHANGE SPEC.		LJ
B27	09.08.27	 ADD OPTION		zx
B28	09.09.07	 ADD OPTION		zx
B29	09.11.11	 ADD OPTION		xzhen
B30	09.11.16	 ADD OPTION		xzhen
B31	09.12.18	 ADD OPTION		xzhen

DASH#	NUMBER OF POSITIONS	A DIMENSION	B DIMENSION	M DIMENSION	P DIMENSION	PINS REMOVED	PLATED	HOUSING COLOR
050	1*4	10.16	7.62	6.00	2.54	NONE	1u"Au	BLACK
051	1*2	5.08	2.54	6.00	2.54	NONE	1u"Au	BLACK
052	2*8	20.32	17.78	6.00	2.54	10,14	1u"Au	BLACK
053	1*8	20.32	17.78	6.00	2.54	4	1u"Au	BLACK
054	2*4	10.16	7.62	6.00	2.54	NONE	1u"Au	BLACK
055	2*2	5.08	2.54	6.00	2.54	NONE	1u"Au	BLACK
056	2*10	25.4	22.86	6.00	2.54	10	1u"Au	BLACK
057	2*5	12.7	10.16	6.00	2.54	NONE	1u"Au	BLACK
058	2*5	12.7	10.16	6.00	2.54	4,7	1u"Au	BLACK
059	1*5	12.7	10.16	6.00	2.54	2	1u"Au	BLACK
060	2*7	17.78	15.24	6.00	2.54	13	1u"Au	BLACK
061	2*8	20.32	17.78	6.00	2.54	4	1u"Au	BLACK
062	2*3	7.62	5.08	6.00	2.54	2	1u"Au	BLACK
063	particular spec(SMT)							
064	particular spec(ANCHOR)							
065	2*8	20.32	17.78	6.00	2.54	8,16	1u"Au	BLACK
066	2*9	22.86	20.32	6.00	2.54	13	1u"Au	BLACK
067	2*5	12.7	10.16	6.00	3.0	10	1u"Au	BLACK
068	2*17	43.18	40.64	6.00	2.54	3,25,26	1u"Au	BLACK
069	particular spec(SMT)							
070	2*5	12.7	10.16	6.00	2.54	2	1u"Au	WHITE
071	particular spec(SMT)							
072	particular spec(SMT)							
073	particular spec(STAPLE)							
074	1*3	7.62	5.08	6.00	3.0	NONE	1u"Au	BLACK
075	1*3	7.62	5.08	6.00	3.0	2	1u"Au	BLACK
076	2*5	12.7	10.16	6.00	3.0	10	1u"Au	BLACK
077	2*5	12.7	10.16	6.00	3.0	8	1u"Au	BLACK
078	2*5	12.7	10.16	6.00	3.0	2	1u"Au	BLACK
079	1*2	5.08	2.54	6.00	3.0	NONE	1u"Au	BLACK
080	2*8	20.32	17.78	6.00	3.0	10,14	1u"Au	BLACK

DASH#	NUMBER OF POSITIONS	A DIMENSION	B DIMENSION	M DIMENSION	P DIMENSION	PINS REMOVED	PLATED	HOUSING COLOR
081	1*8	20.32	17.78	6.00	3.0	4	1u"Au	BLACK
082	2*10	25.4	22.86	6.00	3.0	10	1u"Au	BLACK
083	2*5	12.7	10.16	6.00	2.54	2	1u"Au	BLUE(301C)
084	2*5	12.7	10.16	6.00	2.54	10	1u"Au	WHITE
085	2*12	30.48	27.94	6.00	2.54	3	1u"Au	BLACK
086	2*7	17.78	15.24	6.00	2.54	8	1u"Au	BLACK
087	particular spec(ANCHOR)							
088	particular spec(SMT)							
089	2*5	12.7	10.16	6.00	2.54	3,9	1u"Au	BLACK
090	2*5	12.7	10.16	6.00	2.54	7,9	1u"Au	BLACK
091	2*17	43.18	40.64	6.00	2.54	3,25,26	15u"Au	BLACK
092	1*3	7.62	5.08	6.00	3.0	2	1u"Au	BLACK
093	particular spec(SMT)							
094	particular spec(SMT)							

GENERAL TOLERANCE ±0.25mm GENERAL ANGLE TOLERANCE ±3° 	 WIESON TECHNOLOGIES CO., LTD		PART NO.: G2100C888-****	
	DRAWN BY	Anly(WSC)	DRAWING NO.	G2100C888-****
	CHECKED BY	KEVIN	DRAWING SIZE	A4
	APPROVED BY	JERRY	UNIT	mm
	SORTING NO.	WSC	PAGE	3 OF 6

REFERENCE

[ARTICLE:044033 V4]

RoHS Compliant

DASH#	NUMBER OF POSITIONS	A DIMENSION	B DIMENSION	M DIMENSION	DIMENSION	PINS REMOVED	PLATED	HOUSING COLOR
095	1*3	7.62	5.08	6.00	3.00	NONE	1u"Au	BLACK
096	1*3	7.62	5.08	6.00	3.00	2	1u"Au	BLACK
097	2*5	12.7	10.16	6.00	3.00	10	1u"Au	BLACK
098	2*8	20.32	17.78	6.00	3.00	14	1u"Au	BLACK
099	2*3	7.62	5.08	6.00	3.00	3	1u"Au	BLACK
100	2*10	25.4	22.86	6.00	3.00	4	1u"Au	BLACK
101	2*5	12.7	10.16	6.00	3.00	8	1u"Au	BLACK
102	2*5	12.7	10.16	6.00	3.00	2	1u"Au	BLACK
103	2*3	7.62	5.08	6.00	3.00	NONE	1u"Au	BLACK
104	1*4	10.16	7.62	6.00	3.00	NONE	1u"Au	BLACK
105	1*2	5.08	2.54	6.00	3.00	NONE	1u"Au	BLACK
106	2*8	20.32	17.78	6.00	3.00	10,14	1u"Au	BLACK
107	2*10	25.4	22.86	6.00	3.00	10	1u"Au	BLACK
108	2*5	12.7	10.16	6.00	3.00	4,7	1u"Au	BLACK
109	1*5	12.7	10.16	6.00	3.00	2	1u"Au	BLACK
110	2*7	17.78	15.24	6.00	3.00	13	1u"Au	BLACK
111	2*3	7.62	5.08	6.00	3.00	2	1u"Au	BLACK
112	2*8	20.32	17.78	6.00	3.00	8,16	1u"Au	BLACK
113	2*5	12.7	10.16	6.00	3.00	2	1u"Au	WHITE
114	2*5	12.7	10.16	6.00	3.00	2	1u"Au	BLUE(301C)
115	2*5	12.7	10.16	6.00	3.00	10	1u"Au	WHITE
116	2*7	17.78	15.24	8.08	3.00	NONE	15u"Au	BLACK
117 PARTICULAR SPEC								
118	2*3	7.62	5.08	6.00	3.00	1	1u"Au	BLACK
119	2*8	20.32	17.78	6.00	3.00	12	1u"Au	BLACK
120	2*12	30.48	27.94	6.00	2.54	NONE	15u"Au	BLACK
121 PARTICULAR SPEC(G2100C888-003* WITH COLOR LABEL)								
122	2*12	30.48	27.94	6.00	3.00	NONE	15u"Au	BLACK
123	2*5	12.7	10.16	6.00	2.54	8	1u"Au	YELLOW
124	1*6	15.24	12.7	6.00	2.54	3	1u"Au	BLACK
125	1*2	5.08	2.54	6.00	3.00	NONE	15u"Au	BLACK
126	1*6	15.24	12.7	6.00	3.00	NONE	15u"Au	BLACK
127	2*5	12.7	10.16	6.00	2.54	2	1u"Au	YELLOW
128	1*3	7.62	5.08	6.00	2.54	3	1u"Au	BLACK
129	2*5	12.7	10.16	6.00	2.54	9 , 10	1u"Au	BLACK

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	05.03.07	NEW RELEASE		Anly
B	05.10.31	ADD OPTION	TECR05001450	WZJUN
B15	08.05.07	ADD OPTION		Joanna
B16	08.10.14	ADD OPTION		LJ
B17	08.11.19	ADD OPTION		LJ
B18	08.12.08	ADD OPTION		LJ
B19	09.01.13	ADD OPTION		LJ
B20	09.01.20	ADD OPTION		violet
B21	09.01.22	ADD OPTION		violet
B22	09.02.11	CHANGE COLOR	CECR09003996	Wy
B23	09.02.17	CHANGE SPEC.		lj
B24	09.02.25	CHANGE SPEC.	CECR09004048	lj
B25	09.03.05	CHANGE SPEC.		Wy
B26	09.04.28	CHANGE SPEC.		LJ
B27	09.08.27	ADD OPTION		zx
B28	09.09.07	ADD OPTION		zx
B29	09.11.11	ADD OPTION		xzhen
B30	09.11.16	ADD OPTION		xzhen
B31	09.12.18	ADD OPTION		xzhen

DASH#	NUMBER OF POSITIONS	A DIMENSION	B DIMENSION	M DIMENSION	P DIMENSION	PINS REMOVED	PLATED	HOUSING COLOR
130	2*7	17.78	15.24	6.00	2.54	10	1u"Au	BLACK
131	2*5	12.7	10.16	6.00	2.54	7 , 8	1u"Au	BLACK
132	2*6	15.24	12.7	6.00	2.54	11	1u"Au	BLACK
133	2*5	12.7	10.16	6.00	2.54	10	1u"Au	YELLOW
134	2*5	12.7	10.16	6.00	2.54	2	1u"Au	GREEN(355C)
135	1*5	12.7	10.16	6.00	2.54	2	1u"Au	YELLOW
136	2*5	12.7	10.16	6.00	2.54	8	1u"Au	GREEN(355C)
137	2*7	17.78	15.24	6.00	2.54	9,13	1u"Au	BLACK
138	2*5	12.7	10.16	6.00	2.54	9,10	1u"Au	BLUE(301C)
139	PARTICULAR SPEC (G2100C888-139* WITH COLOR LABEL)							
140	2*5	12.7	10.16	6.00	2.54	5	1u"Au	BLACK
141	2*8	20.32	17.78	6.00	2.54	12	1u"Au	BLACK
142 PARTICULAR SPEC								
143 PARTICULAR SPEC								
144	2*5	12.7	10.16	6.00	2.54	2	1u"Au	RED(186U)
145 PARTICULAR SPEC								
GENERAL TOLERANCE ±0.25mm GENERAL ANGLE TOLERANCE ±3° 		WIESON TECHNOLOGIES CO., LTD				PART NO.: G2100C888-****		
						DRAWING NO. G2100C888-****		
						DRAWING SIZE A4		
						UNIT mm		
		DRAWN BY Any(WSC) CHECKED BY KEVIN APPROVED BY JERRY SORTING NO. WSC				PAGE 4 OF 6		

REFERENCE

[ARTICLE:044033 V4]

RoHS Compliant

	DASH#	NUMBER OF POSITIONS	A DIMENSION	B DIMENSION	M DIMENSION	P DIMENSION	PINS REMOVED	PLATED	HOUSING COLOR
	146	2*6	15.24	12.7	6.00	2.54	8	1u"Au	BLACK
	147	2*6	15.24	12.7	6.00	2.54	8	1u"Au	YELLOW
△	148	PARTICULAR SPEC							
△	149	PARTICULAR SPEC							
△	150	PARTICULAR SPEC							
△	151	PARTICULAR SPEC							
△	152	PARTICULAR SPEC							
△	153	PARTICULAR SPEC							
△	154	PARTICULAR SPEC							
△	155	PARTICULAR SPEC							
△	156	PARTICULAR SPEC							
△	157	PARTICULAR SPEC							
△	158	2*5	12.7	10.16	6.00	2.54	10	1u"Au	GREEN (355C)
△	159	2*7	17.78	15.24	6.00	2.54	NONE	15u"Au	BLACK
△	160	PARTICULAR SPEC							
△	161	PARTICULAR SPEC							
△	162	2*14	35.56	33.02	6.00	2.54	NONE	1u"Au	GREEN (355C)
△	163	2*5	12.7	10.16	6.00	3.00	5	1u"Au	BLACK
△	164	1*10	25.4	22.86	6.00	2.54	9	1u"Au	BLACK
△	165	2*5	12.7	10.16	6.00	3.00	NONE	1u"Au	BLACK
△	166	PARTICULAR SPEC							
△	167	PARTICULAR SPEC							
△	168	PARTICULAR SPEC							
△	169	2*10	25.4	22.86	6.00	2.54	NONE	1u"Au	BLACK
△	170	2*10	25.4	22.86	6.00	2.54	NONE	1u"Au	BLACK
△	171	PARTICULAR SPEC							
△	172	1*3	7.62	5.08	6.00	2.54	NONE	30u"Au	BLACK
△	173	1*2	5.08	2.54	6.00	2.54	NONE	30u"Au	BLACK
△	174	2*5	12.7	10.16	6.00	2.54	10	30u"Au	BLACK
△	175	PARTICULAR SPEC							
△	176	PARTICULAR SPEC							
△	177	2*2	5.08	2.54	5.84	3.18	NONE	15u"Au	BLACK
△	178	1*5	12.7	10.16	5.84	3.18	4	15u"Au	BLACK

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	05.03.07	NEW RELEASE		Anly
B	05.10.31	△ ADD OPTION	TECR05001450	WZJUN
B15	08.05.07	△ ADD OPTION		Joanna
B16	08.10.14	△ ADD OPTION		LJ
B17	08.11.19	△ ADD OPTION		LJ
B18	08.12.08	△ ADD OPTION		LJ
B19	09.01.13	△ ADD OPTION		LJ
B20	09.01.20	△ ADD OPTION		violet
B21	09.01.22	△ ADD OPTION		violet
B22	09.02.11	△ CHANGE COLOR	CECR09003996	Wy
B23	09.02.17	△ CHANGE SPEC.		lj
B24	09.02.25	△ CHANGE SPEC.	CECR09004048	lj
B25	09.03.05	△ CHANGE SPEC.		Wy
B26	09.04.28	△ CHANGE SPEC.		LJ
B27	09.08.27	△ ADD OPTION		zx
B28	09.09.07	△ ADD OPTION		zx
B29	09.11.11	△ ADD OPTION		xzhen
B30	09.11.16	△ ADD OPTION		xzhen
B31	09.12.18	△ ADD OPTION		xzhen



















	DASH#	NUMBER OF POSITIONS	A DIMENSION	B DIMENSION	M DIMENSION	P DIMENSION	PINS REMOVED	PLATED	HOUSING COLOR
△	179	2*17	43.18	40.64	6.00	2.54	NONE	1u"Au	BLACK
△	181	2*12	30.48	27.94	6.00	3.00	3	1u"Au	BLACK
△	182	2*4	10.16	7.62	6.00	2.54	7	1u"Au	WHITE
△	183	1*8	20.32	17.78	6.00	3.00	NONE	1u"Au	BLACK
△	184	2*3	7.62	5.08	6.00	2.54	3	1u"Au	WHITE
△	186	2*5	12.7	10.16	6.00	2.54	2	15u"Au	BLACK
△	189	2*8	20.32	17.78	6.00	2.54	13	15u"Au	BLACK
△	190	1*6	15.24	12.7	5.84	3.18	NONE	15u"Au	BLACK
△	191	2*9	22.86	20.32	6.00	2.54	NONE	1u"Au	BLACK
△	192	1*5	12.7	10.16	5.84	3.18	NONE	1u"Au	BLACK
△	193	1*3	7.62	5.08	5.84	3.18	NONE	15u"Au	BLACK
△	194	2*3	7.62	5.08	6.00	3.00	NONE	15u"Au	BLACK
△	195	2*15	38.10	35.56	5.84	3.18	3	1u"Au	BLACK






























GENERAL TOLERANCE ±0.25mm GENERAL ANGLE TOLERANCE ±3° 	WIESON TECHNOLOGIES CO., LTD		PART NO.: G2100C888-****	
	DRAWN BY	Anly(WSC)	DRAWING NO.	G2100C888-****
	CHECKED BY	KEVIN	DRAWING SIZE	A4
	APPROVED BY	JERRY	UNIT	mm
SORTING NO.		WSC	PAGE	5 OF 6



REFERENCE

[ARTICLE:044033 V4]

RoHS Compliant

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	05.03.07	NEW RELEASE		Anly
B	05.10.31	 ADD OPTION	TECR05001450	WZJUN
B15	08.05.07	 ADD OPTION		Joanna
B16	08.10.14	 ADD OPTION		LJ
B17	08.11.19	 ADD OPTION		LJ
B18	08.12.08	 ADD OPTION		LJ
B19	09.01.13	 ADD OPTION		LJ
B20	09.01.20	 ADD OPTION		violet
B21	09.01.22	 ADD OPTION		violet
B22	09.02.11	 CHANGE COLOR	CECR09003996	Wy
B23	09.02.17	 CHANGE SPEC.		lj
B24	09.02.25	 CHANGE SPEC.	CECR09004048	lj
B25	09.03.05	 CHANGE SPEC.		Wy
B26	09.04.28	 CHANGE SPEC.		LJ
B27	09.08.27	 ADD OPTION		zx
B28	09.09.07	 ADD OPTION		zx
B29	09.11.11	 ADD OPTION		xzhen
B30	09.11.16	 ADD OPTION		xzhen
B31	09.12.18	 ADD OPTION		xzhen

	196	2*5	12.70	10.16	5.84	3.18	NONE	1u"Au	BLACK
	197	2*8	20.32	17.78	5.84	3.18	NONE	15u"Au	BLACK
	198	PARTICULAR SPEC							
	199	2*25	63.50	60.96	6.00	2.54	NONE	1u"Au	BLACK
	200	PARTICULAR SPEC							
	DASH#	NUMBER OF POSITIONS	A DIMENSION	B DIMENSION	M DIMENSION	P DIMENSION	PINS REMOVED	PLATED	HOUSING COLOR
	201	PARTICULAR SPEC							
	202	PARTICULAR SPEC							
	203	PARTICULAR SPEC							
	204	2*25	63.50	60.96	6.00	3.00	NONE	1u"Au	BLACK
	211	1*2	5.08	2.54	6.00	3.00	NONE	30u"Au	BLACK
	212	2*5	12.7	10.16	6.00	3.00	NONE	30u"Au	BLACK
	213	1*3	7.62	5.08	6.00	3.00	NONE	30u"Au	BLACK
	214	PARTICULAR SPEC							
	215	2*7	17.78	15.24	6.00	3.00	5	15u"Au	BLACK
	216	2*13	33.02	30.48	6.00	3.00	26	1u"Au	PURPLE (253U-254U)
	217	PARTICULAR SPEC							
	218	1*3	7.62	5.08	6.00	2.54	NONE	1u"Au	RED (186U)
	219	2*4	10.16	7.62	6.00	3.00	7	1u"Au	BLACK
	220	2*12	30.48	27.94	6.00	2.54	3	1u"Au	BLACK
	221	2*10	25.4	22.86	8.08	3.00	NONE	1u"Au	BLACK
	222	2*5	12.7	10.16	6.00	2.54	2	1u"Au	CAFE(478C)
	223	1*4	10.16	7.62	6.00	2.54	3	1u"Au	YELLOW(123C)
	225	2*3	7.62	5.08	6.00	2.54	2,6	1u"Au	RED(032C)
	226	1*4	10.16	7.62	6.00	2.54	NONE	1u"Au	WHITE
	227	1*2	5.08	2.54	6.00	2.54	NONE	1u"Au	WHITE
	229	1*2	5.08	2.54	6.00	2.54	NONE	1u"Au	RED(032C)
	230	1*2	5.08	2.54	6.00	2.54	NONE	1u"Au	BLUE(301C)
	231	1*3	7.62	5.08	6.00	3.00	NONE	1u"Au	BLUE(301C)
	232	1*3	7.62	5.08	6.00	3.00	NONE	1u"Au	RED(032C)

GENERAL TOLERANCE ±0.25mm GENERAL ANGLE TOLERANCE ±3° 	 WIESON TECHNOLOGIES CO., LTD		PART NO.: G2100C888-****	
	DRAWN BY	Anly(WSC)	DRAWING NO.	G2100C888-****
	CHECKED BY	KEVIN	DRAWING SIZE	A4
	APPROVED BY	JERRY	UNIT	mm
	SORTING NO.	WSC	PAGE	6 OF 6

REFERENCE

[ARTICLE:044033 V4]